





## DENALI D-TYPE WATERTUBE BOILER

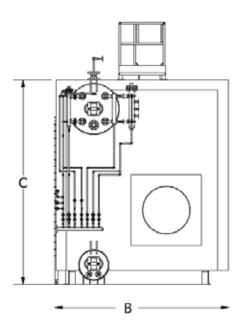

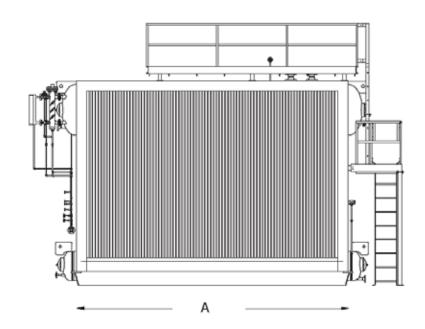

- ✓ Design pressure up to 1,200 psig
- √ Sizes from 10,000 300,000 lb/hr
- √ Capable of burning natural gas, fuel oil, digestor gas, hydrogen, & various other gaseous fuels
- √ Convective type superheaters up to 900° F
- √ Gas outlet configuration: left or right side
- ✓ Available as a Modular Boiler System
- √ Offered in the patented DFW design

	LENGTH (A)	WIDTH (B)	HEIGHT (C)
30,000 LB/HR	185 in.	120 in.	144 in.
40,000 LB/HR	199 in.	126 in.	156 in.
50,000 LB/HR	219 in.	126 in.	156 in.
60,000 LB/HR	225 in.	126 in.	168 in.
70,000 LB/HR	258 in.	132 in.	168 in.
80,000 LB/HR	277 in.	132 in.	174 in.
90,000 LB/HR	297 in.	136 in.	178 in.
100,000 LB/HR	319 in.	141 in.	179 in.
125,000 LB/HR	358 in.	142 in.	190 in.
150,000 LB/HR	417 in.	146 in.	190 in.
175,000 LB/HR	468 in.	148 in.	190 in.
200,000 LB/HR	510 in.	150 in.	190 in.
250,000 LB/HR	534 in.	174 in.	204 in.
300,000 LB/HR	546 in.	186 in.	252 in.



When it comes to boilers, flexibility and resourcefulness are king. Superior Boiler and our team of Superior Problem Solvers tackle your most complex boiler challenges so you can get down to business and keep the world running. We design and manufacture a complete line of boilers for all market segments. We build to our customers' exact standards at our facility in Hutchinson, KS, and our boilers are installed all over the world.

