





## OTTAWA O-TYPE WATERTUBE BOILER

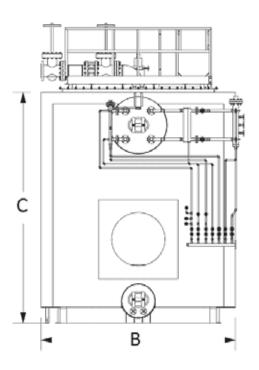

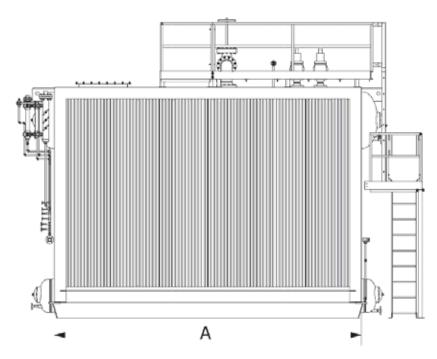

- ✓ Design pressure up to 1,200 psig
- √ Capacities from 10,000 300,000 lb/hr
- √ Capable of burning natural gas, fuel oil, digestor gas, hydrogen, & various other gaseous fuels
- √ Radiant type superheaters up to 900°F
- $\checkmark$  Gas outlet configuration: top
- ✓ Available as a Modular Boiler System
- √ Offered in the patented DFW design

	LENGTH (A)	WIDTH (B)	HEIGHT (C)
30,000 LB/HR	171 in.	114 in.	162 in.
40,000 LB/HR	198 in.	120 in.	162 in.
50,000 LB/HR	207 in.	138 in.	168 in.
60,000 LB/HR	229 in.	138 in.	168 in.
70,000 LB/HR	243 in.	148 in.	178 in.
80,000 LB/HR	261 in.	148 in.	178 in.
90,000 LB/HR	290 in.	148 in.	178 in.
100,000 LB/HR	284 in.	148 in.	184 in.
125,000 LB/HR	357 in.	148 in.	184 in.
150,000 LB/HR	417 in.	150 in.	194 in.
175,000 LB/HR	447 in.	150 in.	202 in.
200,000 LB/HR	482 in.	155 in.	202 in.
250,000 LB/HR	506 in.	170 in.	216 in.
300,000 LB/HR	520 in.	182 in.	274 in.



When it comes to boilers, flexibility and resourcefulness are king. Superior Boiler and our team of Superior Problem Solvers tackle your most complex boiler challenges so you can get down to business and keep the world running. We design and manufacture a complete line of boilers for all market segments. We build to our customers' exact standards at our facility in Hutchinson, KS, and our boilers are installed all over the world.

